

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number
WO 2004/088000 A2

(51) International Patent Classification⁷: **C25C 3/00**

(21) International Application Number:
PCT/EP2004/003625

(22) International Filing Date: 31 March 2004 (31.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03075948.4 31 March 2003 (31.03.2003) EP

(71) Applicant (for all designated States except US): **CORUS TECHNOLOGY BV** [NL/NL]; P.O. Box 10000, NL-1970 CA IJmuiden (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **VAN DER PLAS, Di-
etrich, Willem** [NL/NL]; Terheidenstraat 22, nl-2014 CS
Haarlem (NL).

(74) Agent: **HANSEN, Willem, Joseph, Maria**; Corus Tech-
nology BV, P.O. Box 10000, 1970 CA IJmuiden (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

[Continued on next page]

(54) Title: PROCESS FOR THE ELECTROLYSIS OF ALUMINIUMSULFIDE

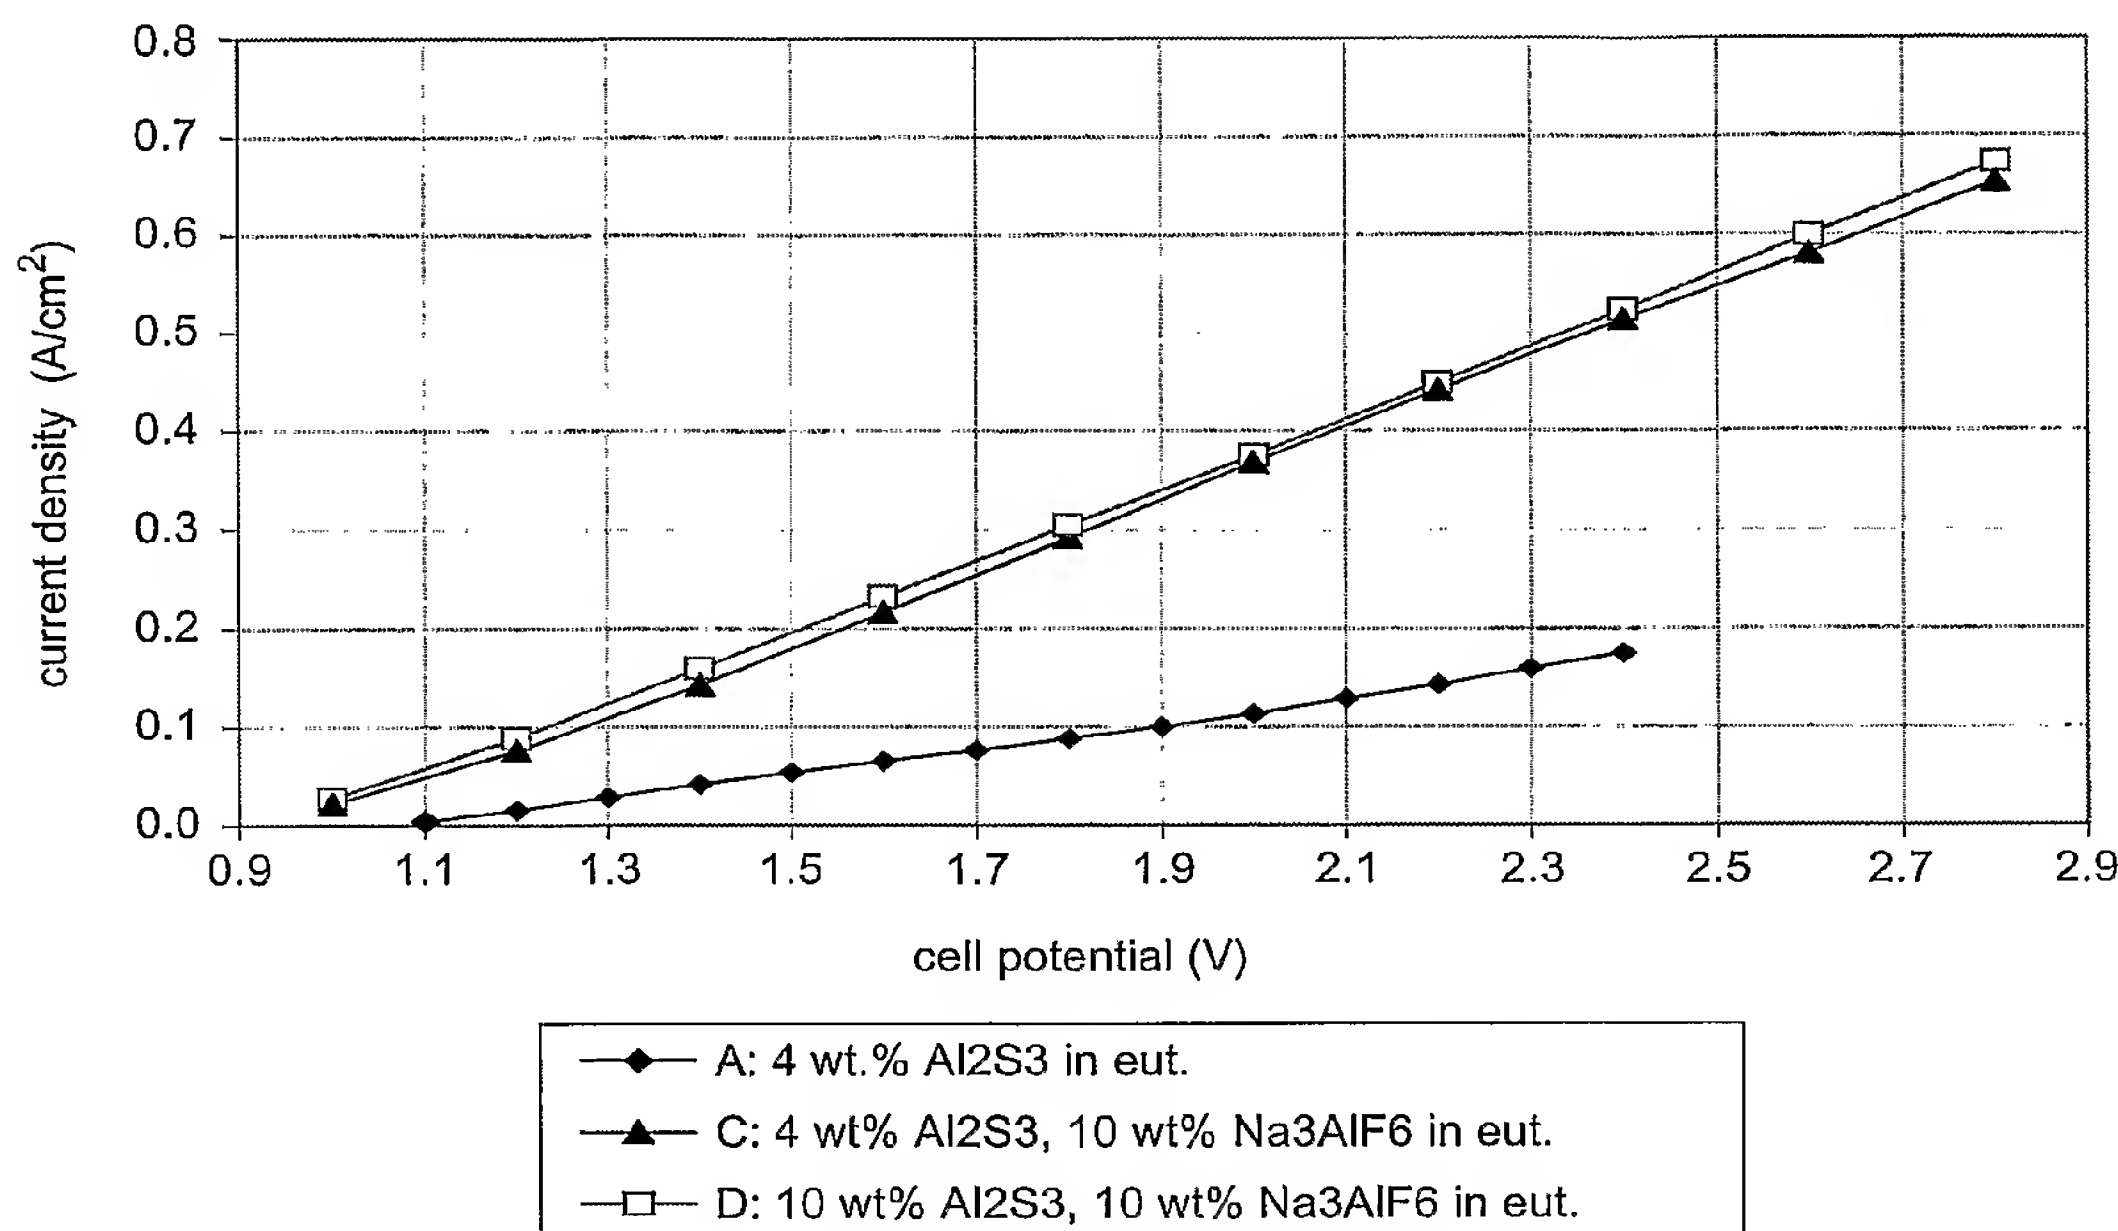

(57) Abstract: Process for the electrolysis of Al_2S_3 , using a bath of molten salt, preferably a bath of molten chloride salt, in which Al_2S_3 is dissolved characterised in that measures are taken to improve the electrical conductivity of the bath, so as to enable an increase in the current density in the bath.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.